

# Canon

## imageRUNNER® 600V

 DEPARTMENTAL  
SYSTEMS

## imageRUNNER® 600V



ADVANCED DIGITAL COPYING  
DESIGNED TO DRIVE YOUR  
PRODUCTIVITY TO NEW HEIGHTS.

In today's fast-paced business environment, you need solutions that deliver what you want, when you want, every time. The Canon imageRUNNER® 600V is equipped to easily handle your most demanding copying needs with high-quality, production-level output and features that are specially designed to optimize performance and simplify tasks. When you're looking for a fast-paced solution to keep up with your work environment, look to the Canon imageRUNNER 600V. It's the complete digital copying system that makes you look and perform your best.

With a 60-page-per-minute copy speed and standard automatic duplexing, the imageRUNNER 600V has the ability to complete all your copy jobs quickly to help keep your department moving.


Tired of having to reload paper in the middle of a long run job? You'll never have to worry about it again with the imageRUNNER 600V. It has a standard paper capacity of 4,150 sheets, upgradable to an enormous 7,650-sheet maximum capacity.

Time-saving features allow you to spend more time doing your job and less time waiting at the device. With Scan-Once-Print-Many, you can enter a job once and output multiple copies. Copy Reservation™ allows you to store a copy job in memory while a current job is being processed.

Create professional-looking output in-house with the optional Finisher-D1's ability to staple up to 50 sheets in any corner of the page, or place two staples in the left- or right-hand margins.

Once again, you can count on Canon to provide you with solutions to fit your needs and budget, bringing your department to new levels of productivity and efficiency.

imageRUNNER 600V Configuration

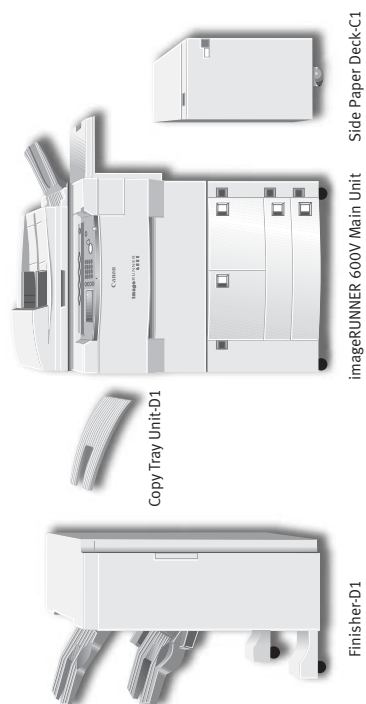

imageRUNNER 600V Specifications

Type:	Digital, Multifunction Imaging System	Output Options:	Finisher-D1
Configuration:	Console, Stationary	Duplexing:	Standard Automatic Trayless Duplexing
Imaging System:	Laser Dry Electrostatic Transfer	Magnification Reduction/Enlargement:	25% to 400% in 1% Increments
Developing System:	Dry Monocomponent Toner Projection	Multiple Copies:	1 to 999
Manufacturing Status:	imageRUNNER Factory-produced New Model*	Acceptable Paper Weights:	17 lb. Bond to 110 lb. Index
Acceptable Originals:	Sheets, Books, 3-dimensional Objects (Up to 4.4 lb. Bond)	Toner:	1.65kg Magnetic Positive Toner (Yield: 33,000 at 6% Coverage)
Image Server Memory:	2.1GB Standard	Drum:	Amorphous Silicon Drum (Estimated Yield 5,000,000 Impressions)
First-print Speed:	6 Seconds or Less from ADF 5.2 Seconds or Less from Platen Glass	Duty Cycle:	250,000 Impressions Per Month
Warm-up Time:	5 Minutes or Less	Dimensions (H x W x D):	44-3/4" x 30-1/8" x 31-3/8" (1,137mm x 764mm x 795mm)
Copy Speed:	60 cpm (Letter) 46 cpm (Letter-R) 30 cpm (Ledger)	Installation Space (W x D):	55-3/4" x 28-3/8" (1,416mm x 795mm)
Scanning Resolution:	600 dpi x 600 dpi	Weight:	553 lb. (251kg)
Interpolated Resolution:	1200 dpi x 600 dpi	Power Requirement:	115V/60Hz
Halftone:	256 Gradations of Gray	Power Consumption:	2.4kW
Scanner:	CCD, 600-dpi resolution	<b>Accessories</b>	
Document Handling:	Automatic Document Feeder	<b>Automatic Document Feeder (Standard)</b>	
Document Feeder Capacity:	100 Sheets	Acceptable Originals:	Statement to Ledger
Max. Original Size:	Ledger (11" x 17")	Capacity:	100 Sheets (Letter) 50 Sheets (Ledger)
Output Sizes		Max. Paper Weight:	13 lb. Bond to 110 lb. Index (Tray) 10 lb. Bond to 110 lb. Index (Bypass)
Cassette:	Statement to Ledger	<b>Side Paper Deck-C1</b>	
Bypass:	Statement to Ledger	Manufacturing Status:	Remanufactured
Paper Supply Standard:	Dual Front-loading Trays (1,500 Sheets Each) Dual Front-loading Cassettes (550 Sheets Each) 50-Sheet Stack Bypass	Paper Capacity:	3,500 Sheets (Letter)
Optional:	3,500-sheet Paper Deck (Total: 7,650 Sheets)	Paper Size:	Letter
		Paper Weights:	17 lb. Bond to 110 lb. Index

Dimensions (H x W x D):	20-1/2" x 12-3/4" x 33" (519mm x 323mm x 583mm)
Weight:	Approx. 90.3 lb. (21kg)
Power Source:	Directly from Main Unit
<b>Finisher-D1</b>	
Manufacturing Status:	Remanufactured
Number of Trays:	Two Trays
Tray Capacity	
Top Tray:	250 Sheets (All Sizes) Non-staple Mode Only
Lower Tray:	2,000 Sheets, 100 Sets (Letter) 1,000 Sheets, 100 Sets (Ledger)
Acceptable Paper Size	
Top Tray:	Postcard (4" x 6") to Ledger
Lower Tray:	Statement to Ledger
Staple Position:	Multiposition Stapling Top Corner (Two Patterns) Side Margin (One Pattern)
Stapling Capacity:	50 Sheets (Letter to Ledger)
Dimensions:	39-1/4" x 25-3/4" x 27-7/8" (999mm x 655mm x 708mm)
Weight:	141 lb. (64kg)
Power Source:	Directly from Main Unit
<b>Copy Tray Unit-D1</b>	
Capacity:	250 Sheets (All Sizes) Non-staple Mode Only

**\*imageRUNNER Factory-produced New Model:**  
The imageRUNNER Factory-produced New Model has been disassembled to a predetermined standard by the original equipment manufacturer, and manufactured with a new serial number. This model contains new, reconditioned and/or recovered parts and fully meets the manufacturer's new product performance and reliability specifications. (This product contains reconditioned parts and materials.)

As an ENERGY STAR® Partner, Canon U.S.A., Inc. has determined that this product meets the ENERGY STAR® guidelines for energy efficiency. ENERGY STAR and the ENERGY STAR certification mark are registered U.S. marks. Canon, Canon Know How, and the GENUINE logo are registered trademarks of Canon Inc. IMAGERUNNER is a registered trademark of Canon Inc. in the U.S. and Canada. Copy Reservation is a trademark, and IMAGEANYWARE is a service mark of Canon U.S.A., Inc. All other terms and product names may be trademarks or registered trademarks of their respective owners, and are hereby acknowledged.

Specifications subject to change without notice.

0040W702  
1203-iR600V-20M

PRINTED ON RECYCLED PAPER IN THE U.S.A.

Canon KNOW HOW®

1-800-OK-CANON  
www.usa.canon.com

Canon U.S.A., Inc.  
One Canon Plaza  
Lake Success, NY 11042

